


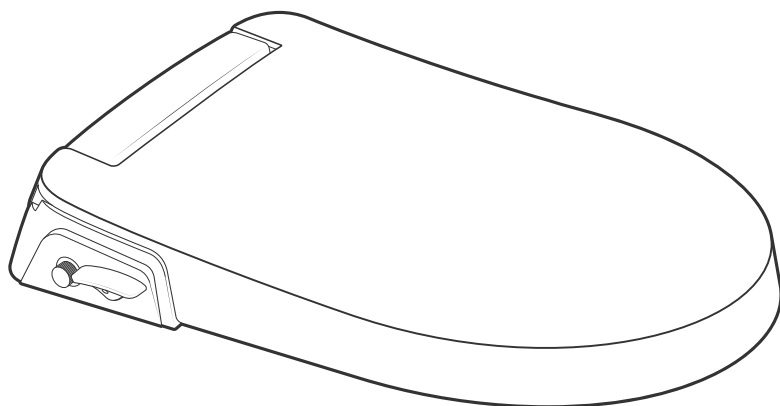

Bidetlity New Standard

Water-Powered Seat

Paper Was A Weird Idea

User Manual

D-Shape



Welcome To Your New Standard

No electricity.

No drama.

Just water.

This is your upgrade from paper to pressure.

From wiping to washing.

Paper Was A Weird Idea.

Let's get you installed.

Safety Instructions

1. Installation Requirements

- Installation must comply with local plumbing regulations.
- If you are unsure about installation, have it performed by a qualified professional.
- Turn off the water supply before installation.
- Connect only to suitable water supply connections.

2. Risk of Burns

- Connecting to hot water may cause burns.
- Always adjust and test the water temperature carefully before use.
- Do not use the product if the water temperature is too high.
- Supervise children and sensitive users during use.

3. Safe Use

- Do not modify or damage the product.
- Use only as intended.
- Children must not play with the product.
- Children may use the product only under constant adult supervision.
- Ensure the water supply is turned off after each use to prevent uncontrolled water flow.
- Cleaning and maintenance must not be performed by children without supervision.

4. Leak Prevention

- Check all connections for tightness before use.
- Turn on the water supply slowly and check for leaks.
- If leaks occur, immediately shut off the water supply and check all connections.

5. Water Quality

- Use only clean tap water.
- Do not connect to wastewater, industrial water, or other unsuitable sources.

Contents

1. Product Overview	02
2. Install Your New Standard	04
2.1 Make Sure It Fits	04
2.2 Installation Parts	06
2.3 Tools You Need	07
2.4 Installation Steps	07
2.5 Operation	12
3. FAQ	13

1. Product Overview

Simple. Powerful. Water-Driven.



Your Bidet includes:

- Dual hygienic wash wands
- Fronttut wash
- Temperature control
- Pressure control
- Non-electric operation
- Soft-close seat

No plugs.

Just water pressure and control.

1.1 Round Top View

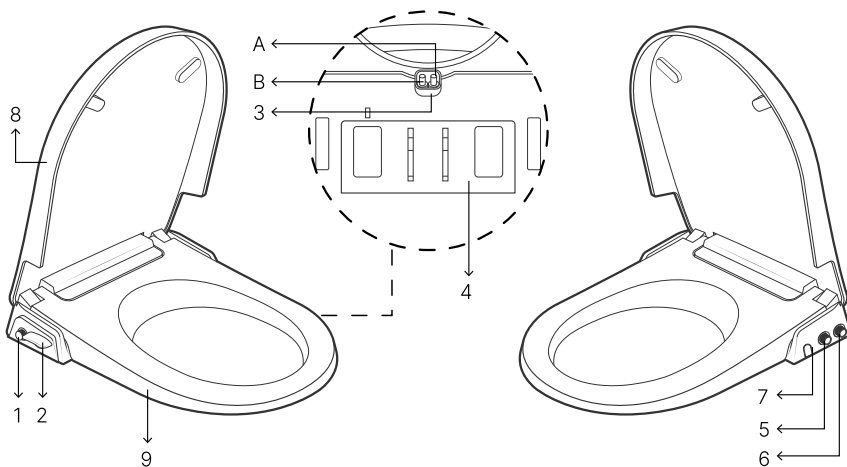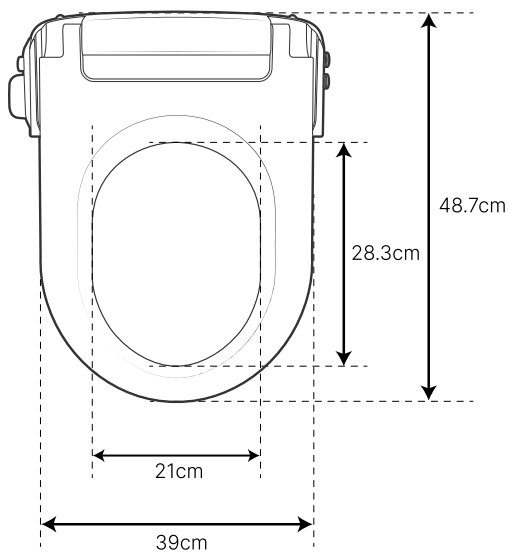

1. Temperature control knob
2. Wash control knob
3. Wash wands
 - a. Posterior wand
 - b. Front wand


4. Mounting plate
5. Cold water inlet
6. Hot water inlet
7. Quick release button
8. Lid
9. Seat

2. Install Your Upgrade


2.1 Make Sure It Fits

Before you install, check these measurements:


- a. Distance from bolt holes to bowl front.

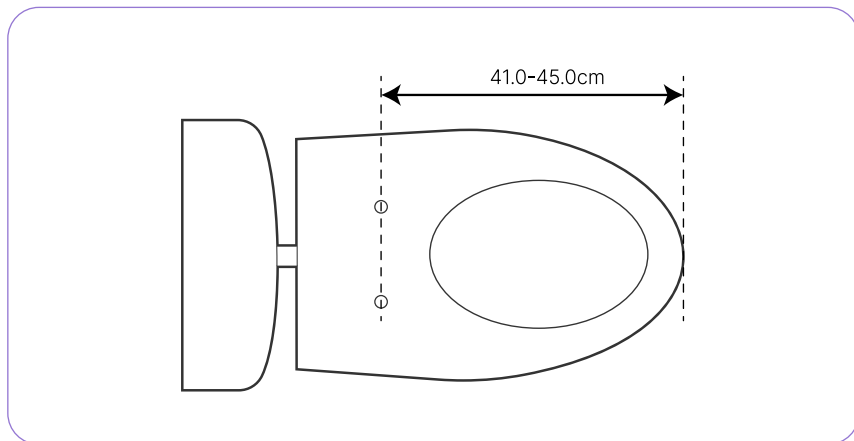


- b. Distance from bolt holes to tank.

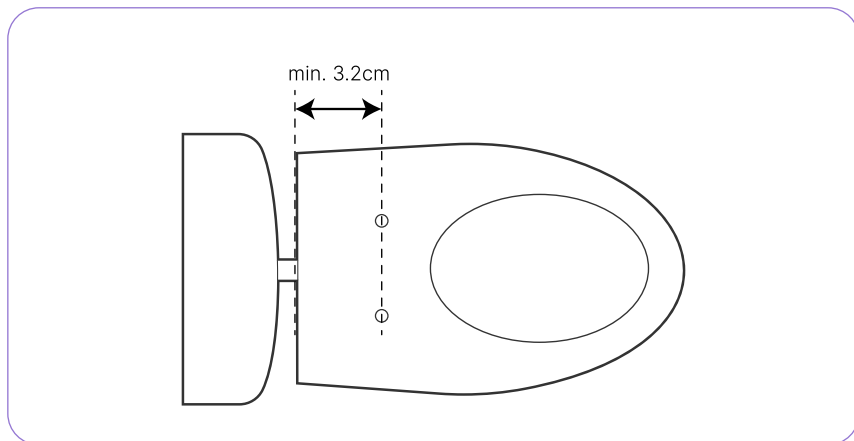


c. Distance between bolt holes.

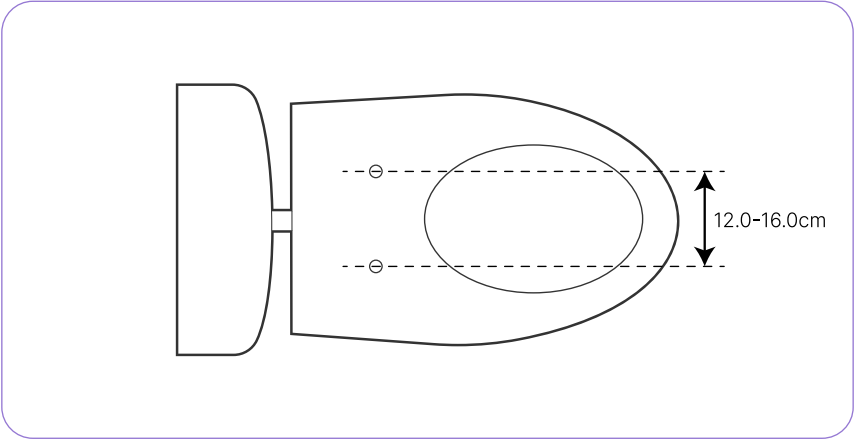

2.2 Installation Parts




Cold water adapter
(includes rubber washer)




Hot water adapter
(includes rubber washer)




Plastic connector
with nut




Hot water supply cap




Cold water hose




Hot water connection
hose (300cm)




Teflon tape



Mounting plate




Adjustable brackets (2)



Metal bolts (2)
Plastic anchor bolts (2)
Plastic nuts (2)

2.3 Tools You Need



Towel




Screwdriver

2.4 Installation Steps


a. Turn off the cold water supply

1. Turn off the water supply at the wall.
2. If your toilet has a tank, flush the toilet to empty it.

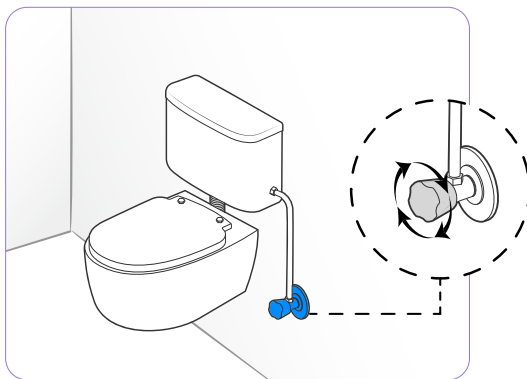

b. Remove Existing Seat


1. Open the hinge covers and remove the bolts with a screwdriver.
2. Lift off the toilet seat.

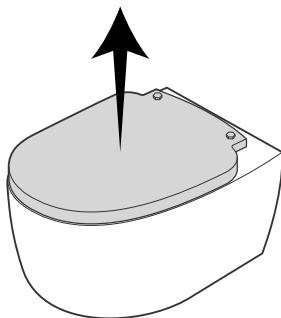

c. Install Mounting Plate (Option 1 - Bottom Fix)

If you can access the underside of your toilet.


1. Place the mounting plate over the bolt holes.
2. Insert the adjustable brackets into the slots. Make sure the flat side is facing down.
3. Insert the bolts through the plate and brackets.
4. Screw on the plastic nuts from underneath and tighten.

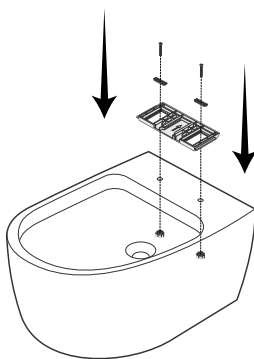

d. Install Mounting Plate (Option 2 - Top Fix)


If you cannot access the underside of your toilet.

1. Insert the plastic anchor bolts into the mounting holes.
2. Place the mounting plate on top.
3. Insert the adjustable brackets into the slots. Make sure the flat side is facing down.
4. Insert the metal bolts through the mounting plate.
5. Tighten the bolts from above until secure.

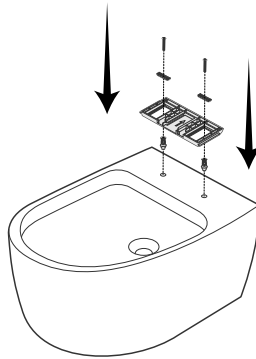


e. Attach Toilet Seat to the Mounting Plate

1. Place the seat on the bowl in front of the mounting plate. Slide it forward until it clicks into place.
2. If needed, adjust the position: Loosen the nuts underneath, move the plate forward or backward, then tighten again.

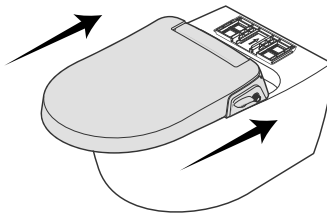

f. Connect Cold Water Supply

1. Place a bucket or towel under the connection to catch any remaining water.
2. Disconnect the water hose from the water supply valve (wall).
3. Insert the rubber washer into the adapter, if not already installed.
4. Attach the adapter to the water supply valve.
5. Reconnect the existing water hose to the adapter (to the toilet tank or your existing connection).
6. Connect the cold water hose (elbow end) to the bidet inlet.
7. Connect the other end of the cold water hose to the adapter. Hand-tighten all connections.
8. Turn the water back on and check for leaks.

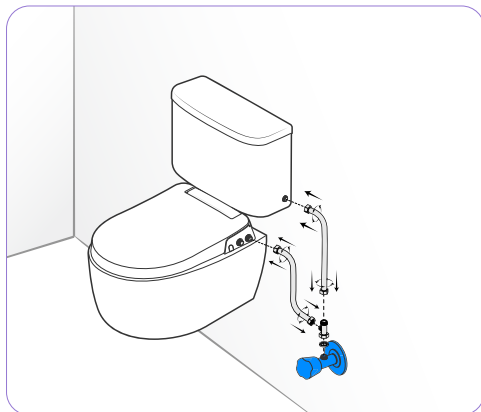


g. Hot Water Inlet

Using cold water only?

Install the hot water cap on the hot water inlet. Make sure it is securely tightened. This step is required to prevent water leakage.


Want to use hot water?

Proceed to the next step.

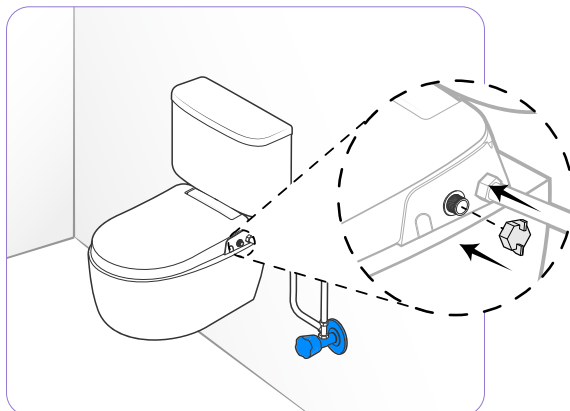

h. Connect Hot Water Supply

1. Turn off the hot water at the valve under your sink.
2. Insert the rubber washer into the adapter, if not already installed.
Attach the adapter to the hot water valve.
3. Reconnect the existing hot water hose to the adapter.
4. Connect the hot water hose (elbow end) to the bidet inlet.
5. Connect the other end of the hot water hose to the adapter. Hand-tighten all connections.

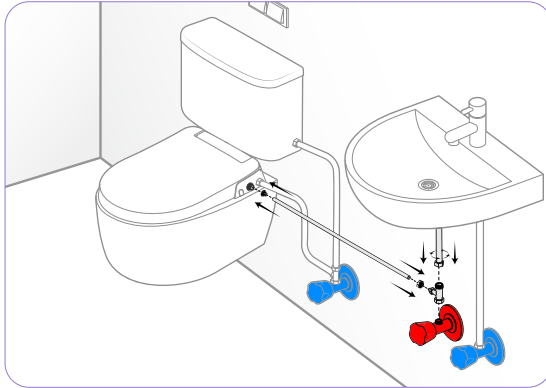

i. Turn on Water Supply & Check for Leaks

1. Slowly turn the water back on and check for leaks.
2. Wait a few minutes and check again. If there are no leaks, you're ready.
3. **If you notice any leaks:**
 - Tighten all connections slightly
 - Check that all rubber washers are properly in place
 - If needed, apply Teflon tape to the threads

2.5 Operation

1. Front Wash:

Turn the dial clockwise.

The further you turn, the stronger the pressure.


2. Butt Wash:

Turn the dial counterclockwise.

3. Self-cleaning Nozzles:


Every time you use the dial, the nozzles run a brief self-clean cycle.

Clean in. Clean out.

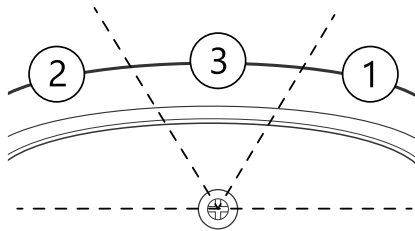

4. Temperature:

Adjust using the temperature dial.

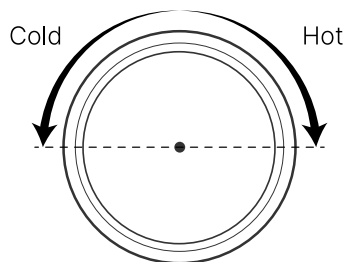

That's it.

No modes.

No menus.

No confusion.

3. FAQ

If Something Feels Off.

Problem	Possible Causes	Solution
Low or no water spray	1. Water supply valve not fully open 2. Low household water pressure 3. Water supply not properly connected 4. Hose kinked or blocked	1. Make sure the water supply valve is fully open 2. Check other taps to confirm overall water pressure 3. Check that all hoses are correctly connected 4. Make sure the hose is not bent or kinked
Water leaks from connections	1. Rubber washer missing or misaligned 2. Loose connections 3. Threads not fully sealed	1. Make sure the rubber washer is properly in place 2. Tighten all connections (do not overtighten) 3. If leaks persist, apply Teflon tape to the threaded connections and tighten again
Bidet moves or feels loose	1. Mounting bolts not fully tightened 2. Mounting plate not aligned properly	1. Tighten the mounting bolts evenly 2. Re-align the mounting plate and brackets 3. Make sure everything sits flat before tightening
Water temperature not as expected	1. Hot water valve not fully open	1. Make sure the hot water valve is fully open

Bidetlity New Standard Paper Was A Weird Idea